



RSX1000

ADA COMPLIANCE CONSIDERATIONS

ACDI Kiosk options can be configured to meet ADA Standards.


The Department of Justice adopted new ADA Standards that took effect on March 15, 2012. The revised regulations replaced original standards of the Americans with Disabilities Act (ADA). The new standards are designed to improve accessibility for 54 million disabled Americans.

The ADA requires all newly constructed public and commercial facilities to be accessible. This includes locations such as office buildings, restaurants, hotels, theaters, doctors' offices, pharmacies, retail stores, museums, libraries, parks, private schools, and daycare centers.

These requirements may apply if you are considering deploying a new kiosk or making updates to an existing project. Ignoring ADA standards can put your business or organization at risk. Compliance lawsuits can result in a court order, monetary damages or civil penalties.


ACDI's RSX1000 line of products come in variations that can help organizations meet ADA compliance goals. This document outlines several considerations. It also includes details on the method of installing the supplied kiosk that is crucial to meeting these needs.






Forward Reach Limits

If a kiosk can be accessed via a forward reach and is unobstructed, the highest touch point is 48 inches and the minimum height is 15 inches.




Obstruction of $\leq 20''$

If there is an obstruction in front of a kiosk (like a countertop) and the depth of the obstruction is 20 inches or less, the highest touch point is 48 inches. The floor must be clear underneath the obstruction at an equal or greater depth.




Obstruction of $> 20''$

If the obstruction exceeds 20 inches, the highest touch point is 44 inches and the maximum depth of the obstruction is 25 inches. The floor must be clear underneath the obstruction at an equal or greater depth.




Side Reach Limits

If a kiosk is only accessible via a parallel approach and the side reach is unobstructed, the highest touch point is 48 inches and the minimum height is 15 inches.

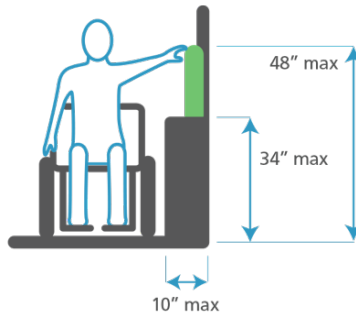

Obstruction of $\leq 10''$

If there is an obstruction (like a countertop) in front of a kiosk and the obstruction depth is 10 inches or less, the maximum height of the obstruction is 34 inches and the highest touch point is 48 inches.

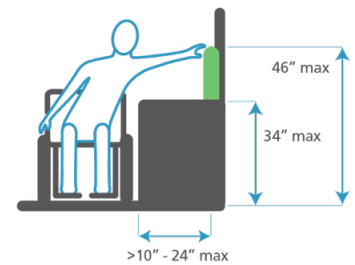

Obstruction of $> 10''$

If the obstruction depth exceeds 10 inches, the maximum depth of the obstruction is 24 inches, the maximum height of the obstruction is 34 inches and the highest touch point is 46 inches.

OPERABLE PARTS

If your kiosk has peripherals – like a printer – the lowest allowable height of the peripheral is 15 inches.

PROTRUSION LIMITS

If your kiosk is wall-mounted and has nothing below it to alert someone with visual impairments navigating with a cane to its presence, it can have a maximum depth of 4 inches from the wall, a minimum height of 27 inches and a maximum height of 80 inches.

FLOOR SPACE REQUIREMENTS

It is the responsibility of the kiosk owner to provide adequate floor space around the kiosk to accommodate wheelchair users. Floor space requirements are outlined in their own section of the ADA website.

MORE INFORMATION

To learn more about the ADA Standards for Accessible Design, visit <http://ada.gov>

The complete ADA standards are also available as a printable PDF. <https://www.adakiosks.com/ada-guidelines.pdf>